

# ПОВЫШЕНИЕ ЭКСПЛУАТАЦИОННОЙ НАДЕЖНОСТИ ПРИ СОВЕРШЕНСТВОВАНИИ ПРОЕКТИРОВАНИЯ, СТРОИТЕЛЬСТВА И РЕКОНСТРУКЦИИ ЗДАНИЙ И СООРУЖЕНИЙ

UDC 624.1

## NUMERICAL RESEARCHES OF THE WORK OF THE PILE WITH END SPHERICAL BROADENING AS PART OF THE PILE GROUP

*V. S. Fedorov, N. V. Kupchikova*

*«Russian University of transport» RUT (MIIT)*

*(Moscow, Russia)*

*Astrakhan State University of Architecture and Civil Engineering*

*(Astrakhan, Russia)*

The article presents some aspects of the development of the theory of constructing design schemes for long pile groups with end spherical broadening and results of their numerical analysis of the load capacity of piles with end broadening in comparison with the operation of piles without widening in the Bush.

**Keywords:** *bored piles, finished piles, technologies of the device, broadenings, shaping.*

The following domestic scientists made a significant contribution to the study of the issues of interaction of piles with soil in their group: Abbasov P.A., Abelev Yu.M., Barvashov V.A., Bartolomey A.A., Bakholdin B.V., Berezantsev V.G., Golubkov V.N., Grigoryan A.A., Gotman N.Z., Gotman A.L., Dalmatov B.I., Devaltovsky E.E., Doroshkevich N.M., Egorov K.E., Sorochan E.A., Pilyagin A.V., Znamensky V.V., Zaretsky Yu. K., Fadeev A. B., Fedorovsky V. G., Razvadovsky D. E., and etc. When analyzing these results, one of the main reasons that change the nature of the work of piles in the bush is the change in the initial natural state of the soil in the inter-pile space caused by the immersion of piles and the mechanism of piling broadening.

The authors [1-30] showed a significant difference in the work of single piles compared with a pile in the group. Differences in work are determined by the physical essence of the interaction of the pile's group through the soil, as shown in the work [Gotman N.Z.] the effect of "compression" of piles with soil occurs when loading, those. additional normal radial tensions occur. The force of compression depends on the pitch of the piles and their length. As the distance between piles in the group increases, the crimping decreases to zero and increases as the pitch decreases. The results of the study show that the pile bush sediment is larger than the single pile sediment with equal loads on the pile. This position for prismatic piles is valid if the distance between piles is from  $3d$  to  $6d$ . The ultimate resistance of the base soil in the pile bush is significantly higher than that of a single pile and decreases with increasing distance between piles. Especially this compression effect, in our opinion, will be more effective when using piles with surface and end broadening. In SP 24.13, in the scientific literature there are no data on the study of work and the calculation of a group of piles with broadening. Therefore, the refinement of calculation schemes and methods for calculating piles with surface and end broadening in a group is relevant.

The bearing capacity of piles with surface and end broadening in the group is composed of soil resistance at the base of the pile, or end broadening, its lateral surface of the prismatic part and the lateral surface of the surface broadening.

We consider design schemes for two cases of a group of piles with end spherical broadening:

- 1) with terminal spherical broadening (rigid), spaced apart from each other at a distance  $a_1$ ;
- 2) with end spherical broadening, with intersecting diameters.

The design scheme of such piles with broadenings in the group for determining the ultimate resistance is constructed using the basic provisions is constructed as follows.

In the diagram, we show in cross-section a bush of piles with end broadening with the number of piles of at least three. The definition of the boundaries of the conditional foundation when calculating the settlement of pile foundations with broadening is determined from below – AB plane, passing through the lower ends of the piles with broadening; from the sides – vertical planes AV and BG, spaced from the axes of the extreme rows of vertical piles with broadenings at a distance of 0.5 pitch piles (fig. 1), but not more than  $1.5d$  ( $d$  – diameter or side of the cross-section of the pile), and in the

presence of inclined piles – passing through the lower ends of these piles; from the top – the ground level surface of the VG. A feature of the work of a group of piles with end broadenings according to the second design scheme, considered in Fig. 2 is the intersection of the radii of broadening at the end of the pile, for example, as a result of injection fixation of soil. In this case, the intersecting end broadening system works like a plate, and the group or pile of piles is included in the work after the broadening device as the foundation for the deep box-type foundation. In this paper, we consider a group of piles with broadening according to the first design scheme.

Calculation of settlement of the conventional foundation is carried out by the method of layer-by-layer summation of deformations of a linearly deformable base with a conditional restriction of the compressible thickness (look at SP 22.13330). The vertical normal stress, which determines the deformations and the depth of the compressible stratum, is calculated only from the action of the load applied to the pile foundation, that is, the weight of the soil within the conditional foundation is not taken into account. Initial stresses are determined to take into account excavation of the pit. When calculating the bases of the bridge supports, the conditional foundation can be taken as limited from the sides by the vertical planes AV and BG, spaced from the outer extreme rows of vertical piles at a distance  $a_1$ .

In this case, the pressure plots under the lower end of the broadening will overlap each other. As a result, the maximum pressure under broadening in the group, as shown by experimental studies, exceeds the pressure value from one pile  $\sigma_1 > \sigma_2$ , the area of pressure transfer to the base also increases (fig. 3). In this case, as for simple piles, the draft of the pile bush with broadening at equal loads on the pile will be more than the draft of a single pile with broadening. This provision is true if  $c < 3d$ . The effect of the mutual influence of piles on each other occurs. If the distance between the piles is  $c > 3d$  – this influence is almost negligible.

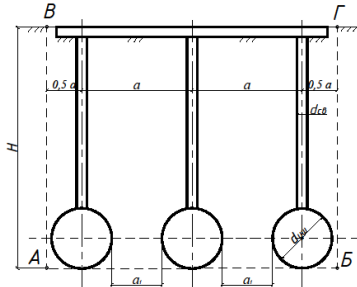


Fig. 1. The design scheme of a group of piles with end spherical broadening spaced apart by a distance  $a_1$

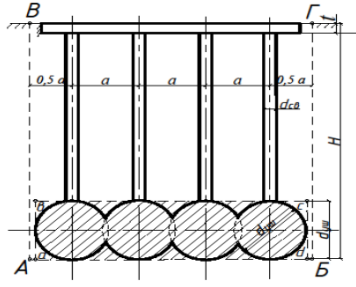


Fig. 2. Design diagram of a group of piles with end spherical broadenings intersecting each other

Numerical modeling and calculation using specialized software systems allow solving complex geotechnical problems, including for analyzing the operation of pile bushes with end spherical broadening. However, the interaction of the components of this system requires a theoretical justification of the resistance and analytical confirmation of the foundations in the soil environment, especially in difficult engineering and geological conditions.

The design model of piles with end spherical broadening formed by rammed crushed stone was created using a geotechnical complex Plaxis 2D Foundation (axisymmetric problem) according to (SP 24.13330.2011), as a cell with horizontal connections along the border of the influence of piles with neighboring piles, subject to uniform loading of neighboring piles. The soil was modeled with 15 nodal finite elements with the size of each  $567.41 \times 10^{-3}$  m. The transfer of force from a pile with broadening to the base causes a stress-strain state in the surrounding ground space. The shape of the shape and values of the stress diagrams are determined not only by the magnitude of this effort but also by the dimensions and geometry of the pile structure and the broadening.

The pile was adopted with a length of 17.5 meters with a radius of 400 mm and a broadening radius of 1.2 m. At the first stage, a study was conducted to simulate the stamping of crushed stone by compacting it with a column height of 0.8 meters in the well. After applying the load to the pile with broadening, we obtained the main stress vectors in the soil mass from vertical loading at the different pitch of piles from 3 to  $9d_{\text{broadening}}$  (Fig. 4).

In Fig. 4, the arrows show the direction of development of deformations (compaction) of the soil and its ejection from the heel and body of the pile with end broadening (a) and without it (b) when the pile pitch in the bush is equal to  $6d_{\text{broadening}}$ . The ejection of the soil affected the change in the initial physical and mechanical characteristics of the base.

At the second stage, iso-fields of vertical, horizontal, and shear stresses from vertical loading were analyzed (Figs. 4 and 5). The results of numerical modeling of the bearing capacity of piles with

terminal broadening in a comparative analysis with the operation of piles without broadening in the bush are presented in Table 1 and in the graphs – Fig. 7 and 8. From table 2 it is seen that the mutual influence of piles with an increase in the pitch of piles with broadening to  $6d_{br}$  decreases and at a distance  $9d_{br}$  completely excluded.

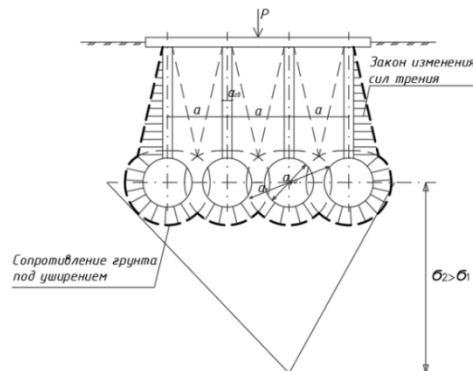


Fig. 3. Scheme of maximum pressure plot below the lower end of a group of piles with end spherical broadening



Fig. 4. The main stress vectors in the soil mass during vertical loading of a pile with end broadening (a) and without broadening (b) with a pitch of piles in the bush  $6d_{broadening}$

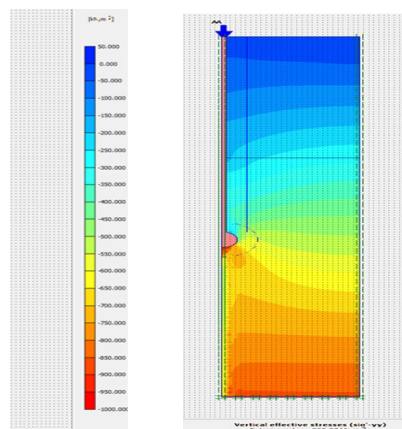


Fig. 5. Contour plots of vertical stress in the soil mass with a pitch of piles  $9d_{br}$

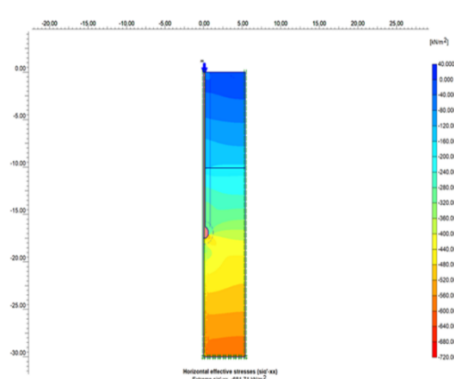


Fig. 6. Contour plots of the horizontal stresses in the soil mass with piles step  $9d_{br}$

Table 1

The results of a numerical analysis of the bearing capacity of piles with end broadening in a comparative calculation with the work of piles without broadening in the bush

Name of the construction	$9d_{br}$	$6d_{br}$	$4,5d_{br}$	$3,75d_{br}$	$3d_{br}$
Pile with broadening	86.708	105.557	134.46	159.593	207.345
Pile without broadening	72.885	82.309	93.6191	105.557	123.15
The relative increase in the bearing capacity of piles with broadening in the bush in relation to the bearing capacity of a single pile with broadening	1	1.22	1.55	1.84	2.39
The relative increase in the bearing capacity of piles without broadening in the bush in relation to the bearing capacity of a single pile without broadening	1	1.13	1.28	1.45	1.69

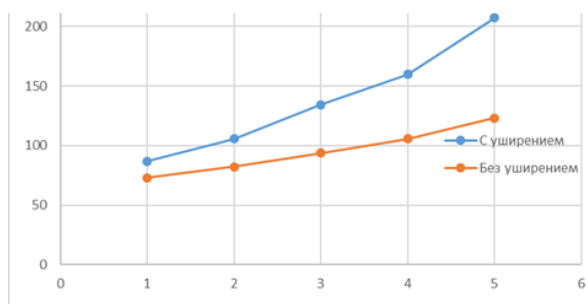


Fig. 6. Graph of bearing capacity (vertical –  $t_n$ ) piles with end broadening and without depending on the pitch of piles (horizontal 1-  $9d_{br}$ , 2 –  $6d_{br}$ , 3 –  $4,5d_{br}$ , 4 –  $3,75d_{br}$ , 5 –  $3d_{br}$ )

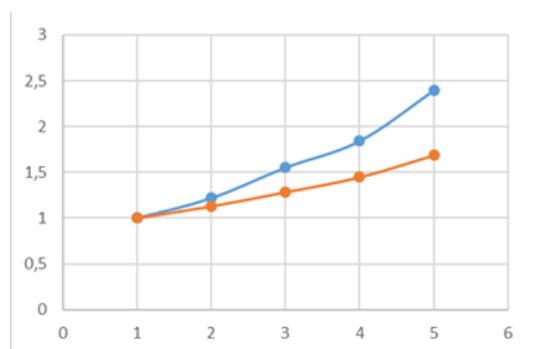


Fig. 7. The relative increase in bearing capacity (vertically – times) of piles with end broadening and without depending on the pitch of piles (horizontal 1-  $9d_{br}$ , 2 –  $6d_{br}$ , 3 –  $4,5d_{br}$ , 4 –  $3,75d_{br}$ , 5 –  $3d_{br}$ )

### Conclusions:

As a result of a numerical analysis of the bearing capacity of piles with end broadenings in a comparative calculation with the work of piles without broadening in the bush:

- vertical and horizontal stresses in the soil mass increase with decreasing pitch of piles with broadenings in the group;
- the direction of development of deformations (compaction) of the soil and its ejection from the heel and body of the pile with and without end broadening with a pitch of piles in the bush equal to  $6d_{br}$  shows that the ejection of the soil affected the change in the initial physical and mechanical characteristics of the base.
- graph of the bearing capacity of piles with end broadening and without depending on the pitch of the piles showed that there was a relative increase in the bearing capacity of piles with broadening in the bush with respect to the bearing capacity of a single pile with broadening by 2.4 times, and a relative increase in the bearing capacity of piles without broadening in the bush with respect to the bearing capacity of a single pile also without broadening – 1.7 time

### References

1. Daiva A. Seavey, Scott A. Ashford. Effects of construction methods on the axial capacity of drilled shafts, Издательство: Department of Structural Engineering University of California. 2004.

2. V.N.S. Murthy. Geotechnical Engineering: Principles and Practices of Soil Mechanics and Foundation Engineering, Издательство: Marcel Dekker, Inc. 2002. – 741-751с.
3. Штоль, Т.М. Технология возведения подземной части зданий и сооружений: учеб. пособие для вузов: Спец.: «Пром. и гражд. стр-во»/ Т. М. Штоль, В. И. Теличенко, В. И. Феклин. – М.: Стройиздат, 1990. – 288с.
4. Зоценко Н.Л., Винников Ю.Л., Бабенко В.А. Усиление фундаментов общественного здания методов вдавливания свай // реконструкция, Санкт-Петербург-2005г.: Материалы международного симпозиума. Ч.2.-С.Петербург, 1993.с.130-133.
5. Тер-Мартиросян А. З. «Взаимодействие фундаментов зданий и сооружений с водонасыщенным основанием при учете нелинейных и реологических свойств грунтов», представленной на соискание ученой степени доктора технических наук по специальности 05.23.02 «Основания и фундаменты, подземные сооружения».
6. Купчикова, Н. В. Влияние уплотнения грунта со щебнем на жёсткость основания / Н. В. Купчикова // Журнал «Промышленное и гражданское строительство» №10 / -Москва, 2007 г.
7. Polishchuk, A. I. Numerical Analysis of Helical Pile–Soil Interaction under Compressive Loads [Электронный ресурс] / А. I. Polishchuk, F. A. Maksimov // IOP Conference Series: Materials Science and Engineering. – 2017. – 262012099. – Режим доступа:
8. Купчикова Н.В. Системный подход в концепции формообразования свайных фундаментов с уширениями // Вестник МГСУ. 2017. Т. 12. Вып. 12 (111). С. 1361–1368.
9. Купчикова Н.В. Формообразование концевых уширений свай в поперечном сечении и методика их деформационного расчёта // Вестник гражданских инженеров. 2015. № 1 (48). С. 88-96.
10. Купчикова Н.В. Методика расчёта свай с уширениями, основанная на свойствах изображений Фурье финитных функций // Промышленное и гражданское строительство. 2012. № 8. С. 24-26.
11. Купчикова Н.В. Экспериментальные исследования по укреплению слабых грунтов под фундаментами физико-химическими методами с применением добавок-пластификаторов // Вестник гражданских инженеров. 2014. № 3 (44). С. 123-132.
12. Мангушев, Р. А. Современные свайные технологии [Учеб. пособие] / Р.А. Мангушев, А. В. Ершов, А. И. Осокин – М.: Издательство АСВ, 2010. – 239с.
13. Штоль, Т.М. Технология возведения подземной части зданий и сооружений:[Учеб. пособие для вузов] Спец.: «Пром. и гражд. стр-во»/ Т. М. Штоль, В. И. Теличенко, В. И. Феклин. – М.: Стройиздат, 1990. – 288с.
14. Федоров, В.С., Купчикова, Н. В. Конструктивные решения свайных фундаментов с поверхностными и концевыми уширениями для структурно-неустойчивых оснований / Вестник гражданских инженеров.- 2011. – №1. – С.88-91.
15. Купчикова, Н. В. Исследование напряжённо-деформированного состояния свайных фундаментов с концевыми и поверхностными уширениями в структурно-неустойчивых основаниях: диссертация кандидата технических наук : 05.23.02 / Купчикова Наталья Викторовна; [Место защиты: Моск. гос. ун-т путей сообщ. (МИИТ) МПС РФ].- Москва, 2010.- 200 с.: ил. РГБ ОД, 61 11-5/32.
16. Григорян, А. А. Свайные фундаменты зданий и сооружений на просадочных грунтах:[Учеб. пособие]/ А. А. Григорян. – М.: Стройиздат, 1984. – 157с.
17. Луга, А. А. Свайные работы:[Учеб. пособие] / А. А. Луга – М. : Трансжелдориздат, 1947.- С. 42-51.
18. Есипов, А. В. Взаимодействие микросвай с грунтовым основанием при усилении фундаментов : диссертация ... кандидата технических наук : 05.23.02.- Тюмень, 2002.- 168 с.: ил. РГБ ОД, 61 03-5/2864-5
19. А. И.Сапожников, А. И. Модель и эффективные расчётные схемы грунтового полупространства / А. И. Сапожников/ Изв. вузов. Сер.: Строительство. – М.: 1996. – Вып. 4. – С. 26-31.
20. Бондаренко, В.М. Федоров, В.С. Модели при решении технических задач [Текст]/В.С.Федоров, В.М. Бондаренко// Перспективы развития строительного комплекса: материалы VIII международной научно-практической конференции/ред. В. А. Гутман, Д. П. Ануфриев – Астрахань: ГАОУ АО ВПО «АИСИ»,2014. – С.262-267.
21. Купчикова, Н. В. Численные исследования работы системы «свайное основание – усиливающие элементы» методом конечных элементов / Н. В. Купчикова // Журнал «Строительство и реконструкция» №6 (50) / -Москва, 2013 г. С.28-36.
22. Бабенко, В. А. Трубчатые микросваи с уширением в нижней части из втрамбованного жёсткого материала. : автореферат. дис. Кандидата технических наук : 05.23.02 – Днепропетровск, 1996 – Количество страниц: 24с.
23. Способ устройства инъекционной сваи: пат. на изобретение № 2238366 Рос. Федерация: Е 02 D 5/34/А.И. Полищук, О.В. Герасимов, А. А. Петухов, Ю.Б. Андриенко, С.С. Нуйкин; заявл. 04.03.2003; опубл. 20.10.2004, Бюл. № 29
24. Инъекционная свая: пат. на полезную модель № 87718 Рос. Федерация: Е 02Д 5/34/А.И. Полищук, А.А. Тарасов, Р.В. Шалгинов; заявл. 11.01.2009; опубл. 20.10.2009, Бюл. № 29
25. Рытов, С. А. Устройство буринъекционных свай с применением электроразрядной технологии в различных грунтовых условиях. : автореферат. дис. Кандидата технических наук : 05.23.02 – Москва, 2009 – Количество страниц: 21с.
26. Rytov, S . A. New geotechnical technologies/ Proceedings of the 15<sup>th</sup> European Young Geotechnical Engineers Conference. Dublin, Ireland. 11-14 September 2002.- с.311-315.
27. Lemanza, W. Lesmana, A/ Deep soil improvement technique using combined deep mixing and jet grouting method// Proc. 17<sup>th</sup> Int. Conf/ on Soil Mechanics and Geotechnical Engineering/ – Alexandra, Egypt, 5-9 october, 2009, с.2439/
28. Готман Ю.А. Определение оптимальных размеров грунтоцементного массива, снижающего перемещения ограждений глубоких котлованов. Диссертация на соискание ученой степени кандидата технических наук / Моск. гос. ун-т путей сообщ. (МИИТ) МПС РФ. Москва, 2011.
29. Ильичев В.А., Никифорова Н.С., Готман Ю.А., Трофимов Е.Ю. Анкеры с дополнительной цементацией как активный метод защиты зданий и коммуникаций в зоне влияния глубоких котлованов. Жилищное строительство. 2014. № 6. С. 35-38.
30. Готман Н.З., Сафиуллин М.Н. Расчет параметров свайного поля при усилении основания фундаментной плиты грунтоцементными сваями. Строительство и реконструкция. 2017. № 1 (69). С. 3-10.